



**MESSER**   
Cutting Systems

# LASERMAT® II

## THE SPECIALIST FOR LASER PROCESSING IN XXL FORMAT

# LASERMAT® II


## THE APEX OF QUALITY



The new Global Control with 24" touch screen monitor offers much room, a clear operator guidance and can be flexibly configured if required



The infinitely rotating bevel head with magnetic collision protection enables bevel cuts up to 45°

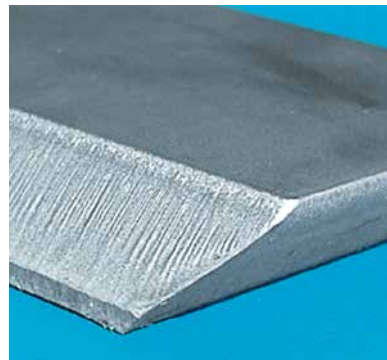

Bevel example in Mild Steel: 15 mm 45° YDS and 30° VAS (cut quality depends upon material)



On request customer specific is possible: e.g. Bevel cutting



# LASERMAT® II

## THE ADVANTAGES

- Large area processing with the CO<sub>2</sub> Laser: on-board resonator
  - Working widths up to 4500 mm, working lengths over 50 m
  - Beam path length compensation guarantees the highest cut quality over the entire working area
  - On-board laser protection hood (Laser protection class 1) permits direct crane loading even with large special formats or parts.
  - A total enclosure, as required for fibre lasers, is not necessary
  - Highly dynamic; simultaneous speeds up to 140 m/min, acceleration up to 0.5 g
  - Track designed especially for laser, grouted after alignment and levelling
  - Robust linear guides
  - Highest positioning and repetitive accuracy
  - Optimised fast process cycles
  - Real time laser power control generates the shortest hole piercing times and the finest micro-stitches
  - Infinitely rotating laser bevel head
  - Continuous bevels from -45° to +45°
  - Special nozzles for bevel cutting in Stainless Steel
  - The widest range of marking processes
  - User specific customisation on request
- And many more...



special processing  
in a dished end



The laser on-board protection hood together with the light barriers allow direct crane loading as well as loading and unloading during the cutting operation



## LASERMAT® II

### Technical Data (all dimensions in mm)

LaserMat®	4200	5000	6000
<b>A</b> Track gauge	4200	5000	6000
<b>B</b> Working width (max.)	3100	3500	4500
<b>C</b> Overall width	5780	6580	7610
<b>D</b> Table height	720	720	720
<b>E</b> Overall height	3100	3100	3100
Total length	Customer specific		
Laser power optional	optionally 4 or 6 kW		

